


PLAN VIEW

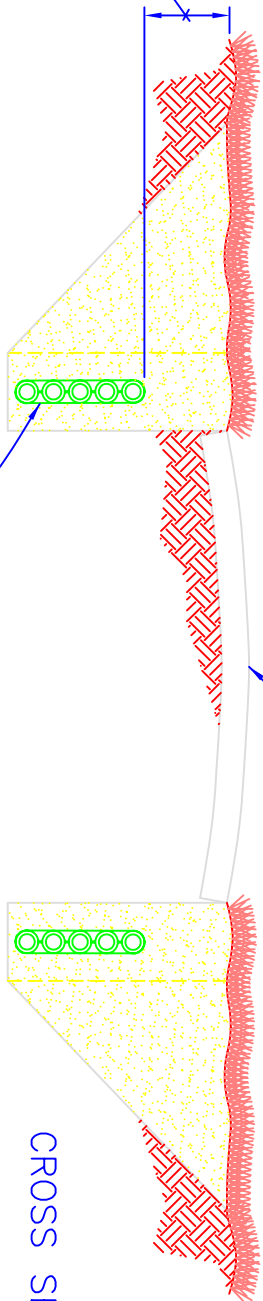

CROSS SECTION

THE VERTICAL HEIGHT OF THE MULTI-FLOW SYSTEM (6", 12", 18") SHOULD BE CHOSEN BASED ON EXISTING CONDITIONS AND DESIGN CRITERIA ESTABLISHED BY THE ENGINEER. PRODUCT SHOULD BE INSTALLED 2" TO 8" BELOW THE SURFACE TO AVOID DAMAGE BY TURF MAINTENANCE EQUIPMENT. MINIMUM SUGGESTED GRADIENT IS 1% FLOW RATE INCREASES GREATLY AS GRADIENT INCREASES.

INSTALL MULTI-FLOW IN CENTER OF TRENCH; BACKFILL MATERIAL SHOULD BE A COARSE WASHED SAND.

TYPICAL MULTI-FLOW INSTALLATION

PATENT 4995759

CART PATH INSTALLATION

